



BH100-04/BH100-05 Fuse Holder



Note: SCCR is limited to the interrupting rating of the installed fuse or 200kA, whichever is less.


DESCRIPTION

BH100-04 and BH100-05 touch safe holders are designed for Φ 10x38 ACC midjet fuses. Indicator can be found on BH100-05 while no indicator is on BH100-04.

SPECIFICATIONS:

- Rated Voltage: 600 Vac / 300 Vdc
- Rated Current: up to 30A
- Short Circuit Current Rating (SCCR): 200kA@600 Vac / 100kA@300Vdc
- Standards: UL 4248-4, EN 60947-3
- Wire Range: 18 - 8 AWG
- Max. Torque: 2.0 N m
- Max. Dissipation: 6 W
- Shell Material: PBT(B206)
- Temperature Tolerance: -40°C to +90°C
- Material Flammability: UL 94-V0
- Mounting: DIN Rail mounting
- Degree of protection IP20
- Approvals: UL (File: E541810)

DIMENSIONS (mm)

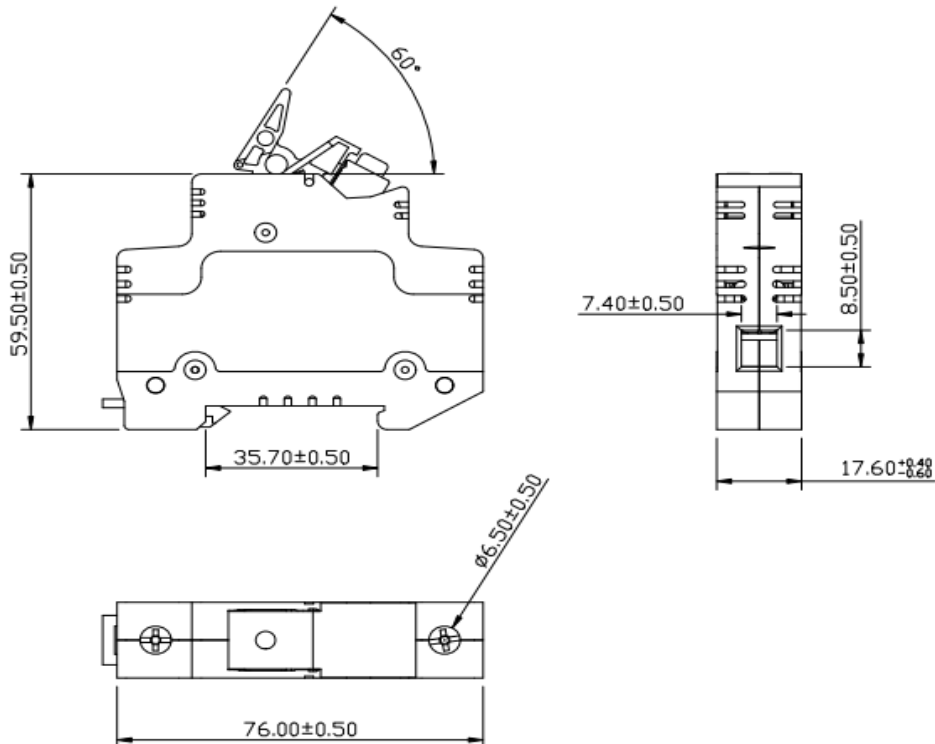



PAKCAGING INFORMATION

Part Number	The size of rectangular box(mm)	The packing quantity of rectangular box	The packing quantity of outer carton box(mm)	The packing quantity of outer carton box
BH100-04	220×84×65	12PCS	456×360×218	24PCS
BH100-05				


Inner Box




Outer carton box




Balance box

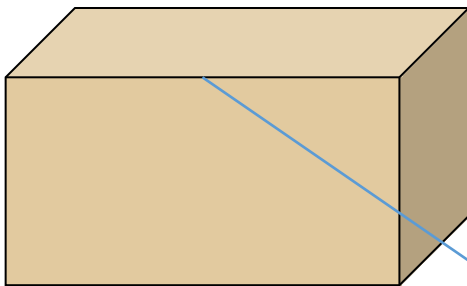


Inner box

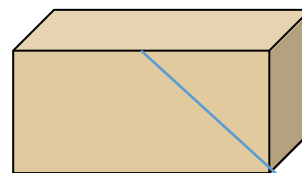


BH100-04

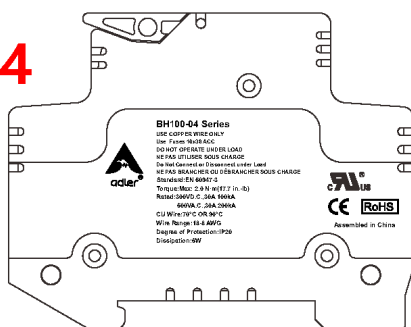

Side view

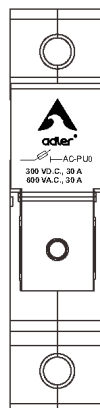


Top View (Handle)

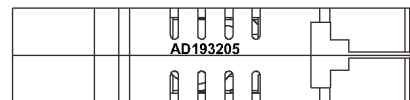


Bottom view


BH100-05

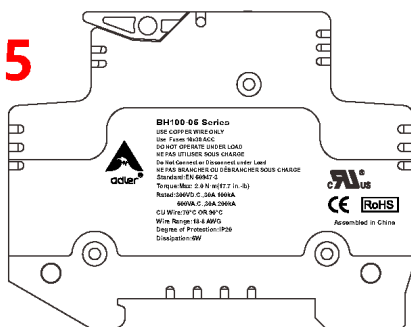

Side view

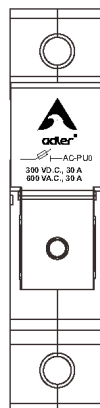

Top View (Handle)



Bottom view

WEB RESOURCES

ADLER Elektrotechnik Leipzig GmbH (Headquarters)
Add: Haynaer Weg 16 04435 Schkeuditz Germany
TEL: +49 34207 973636 FAX: +49 34207 973635

Document NO: BH100-04DS01 A/3
Effective Date: 20241120

adlerelectric.com info@adlerelectric.com
ADLER Elektrotechnik Xi'an Co. Ltd. (Manufacturing)
ADLER Elektrotechnik Dongguan Co. Ltd. (Manufacturing)